


*Properties for ReFresh COPP 70/22*38 - WHITE*

Product Name:	ReFresh COPP 70/22*38 - WHITE
Status:	Production
Appearance:	White
Description:	Post-consumer certified, FDA-LNO certified
Processing Method:	Injection molding
Applications:	Cosmetic, consumer, housewares

Properties	SI	English	Test Method
Specific Gravity	.91	-	ASTM D1238
Melt Flow Rate	20-24 g/10min	-	ASTM D1238
Tensile Strength @ Yield	305 kg/cm ²	-	ASTM D638
Elongation @ Break	>300%	-	ASTM D638
Flexural Modulus	11,900 kg.cm/cm	-	ASTM D790
Izod Impact Strength (1/4 inch)	3.8 kg/ cm ²	-	ASTM D256

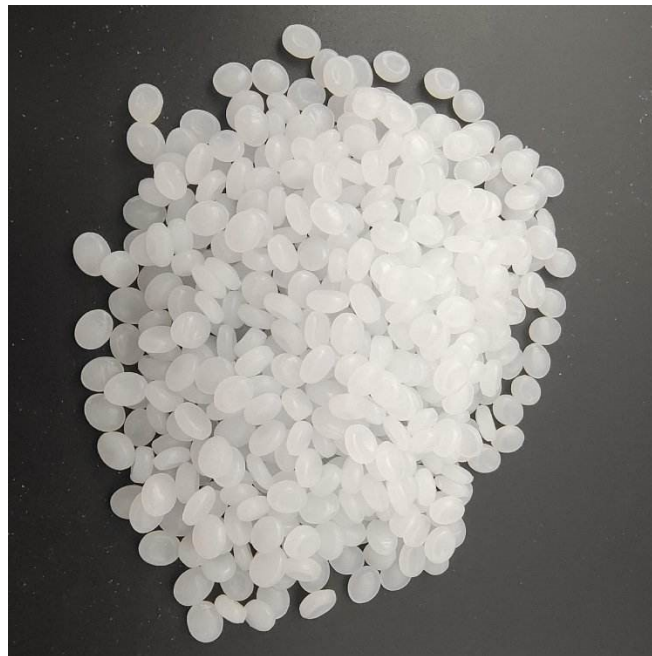

The data listed here is a preliminary data sheet of product. Therefore, this sheet should not be used to establish specification limits or used alone as a basis for design. This information is not intended as a warranty of any kind. Customers must make their own representative test and assume all risks of use, whether used alone or in combination with other products. Your Source, Inc (DBA SUSTAINABLE POLYMER SOLUTIONS). assumes no obligation or liability of any advice furnished by it or results obtained with respect to these products. All warranties of merchantability for a particular purpose or use are excluded and disclaimed.